

2W系列电磁阀(小口径)

2W Series Solenoid Valve(Small Aperture)



2W025-06




2W025-08



2W040-10

符号 Symbol



订购码 Ordering Code


2W	025	08	F	AC110V	D
规格代码 Specification code	流量孔径 Orifice Size	接管口径 Port Size	安装形式 Initial Estate	标准电压 Standard Voltgae	接线形式 Wiring Form
2W: 二位二通电磁阀直动式 2W: 2/2way solenoid valve	012: 1.2mm 020: 2mm 025: 2.5mm 030: 3.0mm 040: 4.0mm	06: 1/8" 08: 1/4" 10: 3/8"	空白: 管接式 F: 带法兰型 Blank: Pipe Jiont type F: Flange Type	DC12V DC24V AC24V AC110V AC220V AC380V	空白: 表示引线式铁壳线圈 Blank: Lead Wire Type D: 接线盒式封塑线圈 Join Connector E: 防爆线圈 Blast-proof Coil G: 防水线圈 Water-proof Coil

规格 Specification

型 号 Model	2W025-06(08)	2W030-08	2W040-10	2WH012-06	2WH012-08	2WH020-10
工作介质 Working Medium	空气、水、油、瓦斯/Air, Water, Oil, Gas					
动作方式 Motion Pattern	直动式 Direct Drive Type					
型式 Type	常闭型/ Normal Close Type					
流量孔径 Aperture of Flow Rate (mm)	2.5	3	4	1.2	2	
CV值 CV Value	0.23	0.33	0.60	0.05	0.15	
接管口径 Joint Pipe Bore	1/8"(1/4")	1/4"	3/8"	1/8"	1/4"	3/8"
使用流体粘度度 Operation Fluid Viscosity	20 CST以下(below)					
使用压力 Working-pressure (kgf/cm ²)	0~7	0~10	0~20			
最大耐压力 Max. Pressure Resistance (kgf/cm ²)	10	15	35			
工作温度范围 Operating Temperature Range (°C)	-5~80					
使用电压范围 Voltage Range	± 10%					
本体材质 Material of Body	黄铜/Brass					
油封材质 Material of Oil Seal	NBR, EPDM或VITON					

*特殊电压及特殊规格请与厂方接洽。Please contact factory for special voltage and sepcification.

外形尺寸图 Overall Dimension Drawing(mm)

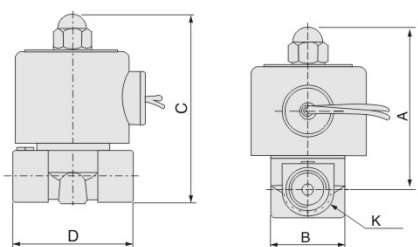

型 号 Model	A	B	C	D	K(G)
2W025-06	66	30.3	75	41.5	1/8"
2W025-08	66	30.3	75	41.5	1/4"
2W030-08	59	24	69	40	1/4"
2W040-10	74	32.5	87	53	3/8"
2WH012-06	66	30.3	75	40.5	1/8"
2WH012-08	66	30.3	75	40.5	1/4"
2WH020-10	74	32.5	87	53	3/8"

2W系列电磁阀(大口径)

2W Series Solenoid Valve(Large Aperture)



2W160-15



2W200-20




2W200-20D



2W250-25

符号 Symbol



订购码 Ordering Code


2W	160	15	F	AC110V	D
规格代码 Specification code	流量孔径 Orifice Size	接管口径 Port Size	安装形式 Initial Estate	标准电压 Standard Voltgae	接线形式 Wiring Form
2W: 二位二通电磁阀直动式 2W: 2/2way solenoid valve	160: 16mm 200: 20mm 250: 25mm 350: 35mm 400: 40mm 500: 50mm	10: 3/8" 15: 1/2" 20: 3/4" 25: 1" 35: 1 1/4" 40: 1 1/2" 50: 2"	空白: 管接式 F: 带法兰型 Blank: Pipe Jiont type F: Flange Type	DC12V DC24V AC24V AC110V AC220V AC380V	空白: 表示引线式铁壳线圈 Blank: Lead Wire Type D: 接线盒式封塑线圈 Join Connector E: 防爆线圈 Blast-proof Coil G: 防水线圈 Water-proof Coil

规格 Specification

型 号 Model	2W160-10	2W160-15	2W200-20	2W250-25	2W350-35	2W400-40	2W500-50
工作介质 Working Medium	空气、水、油、瓦斯/Air, Water, Oil, Gas						
动作方式 Motion Pattern	直动式 Direct Drive Type						
型式 Type	常闭型/ Normal Close Type 常开型/Normal Open Type						
流量孔径 Aperture of Flow Rate (mm)	16	16	20	25	35	40	50
CV值 CV Value	4.8	4.8	7.6	12	24	29	48
接管口径 Joint Pipe Bore	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
使用流体粘度度 Operation Fluid Viscosity	20 CST以下(below)						
使用压力 Working-pressure (kgf/cm ²)	水/Water: 0 ~ 5, 空气/Air: 0 ~ 7, 油/oil: 0 ~ 5, 瓦斯/Gas: 0 ~ 7						
最大耐压力 Max. Pressure Resistance (kgf/cm ²)	10.5						
工作温度范围 Operating Temperature Range (°C)	-5~80						
使用电压范围 Voltage Range	± 10%						
本体材质 Material of Body	黄铜/Brass						
油封材质 Material of Oil Seal	NBR, EPDM 或(or) VITON						

*特殊电压及特殊规格请与厂方接洽。Please contact factory for special voltage and sepcification.

外形尺寸图 Overall Dimension Drawing(mm)

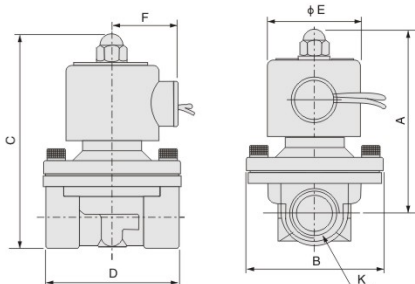

型号 Model	A	B	C	D	E	F	K
2W160-10	101.5	57	117	69	50	36	G3/8 "
2W160-15	101.5	57	117	69	50	36	G1/2 "
2W200-20	107	57	123.5	73	50	36	G3/4 "
2W250-25	111.5	73.5	134.5	99	50	36	G1"
2W350-35	142	95	172	123	70.5	56	G1 1/4 "
2W400-40	142	95	172	123	70.5	56	G1 1/2 "
2W500-50	172	123	209	168	70.5	56	G2"