

HV、K系列手转阀

HV, K Series Hand Switching Valve



HV400-02



HV-04



K34R6-08



K34R6-8D

订购码 Ordering Code

HV	400	02	B
规格代码 Specification	系列号 Series NO	接口口径 Port Size	接管形式 Connection type
手转阀 Hand Switching Valve		02: G1/4 " 03: G3/8 " 04: G1/2 "	空白: 管接式 B: 板接式 Blank: Threaded B: Sub-plate

K	34	R6	L8
规格代码 Specification	系列号 Series	接口代号 Port Size	接管形式 Connection Type
手转阀 Hand Switching Valve	24: 二位四通 34: 三位四通 24: 4/2 Way 34: 4/3 Way	R6: 手转阀 R6: Hand Switching Valve	L6: G 1/8" L8: G 1/4"

规格 Specification



型号 Model	HV400-02	HV400-03	HV400-04	K34R8-L6	K34R8-L8
工作介质 Working Medium	经40微米过滤的空气 / 40 Micron Filtered Air				
有效截面积 Effective Sectional Area	30mm ² (CV=1.68)			18mm ² (CV=1.00)	
接口口径 Joint Pipe Bore	G1/4 "	G3/8 "	G1/2 "	G1/8 "	G1/4 "
使用压力范围 Working-pressure Range	0 ~ 0.8MPa				
使用温度范围 Operating Temperature	0~60℃				

公司可提供密封结构形式为橡胶软密封和陶瓷硬密封的手转阀。

Company can offer Hand-switching Valve with soft rubber seals and hard pottery seals as the seal structure form

外形尺寸图 Overall Dimension Drawing(mm)

HV400

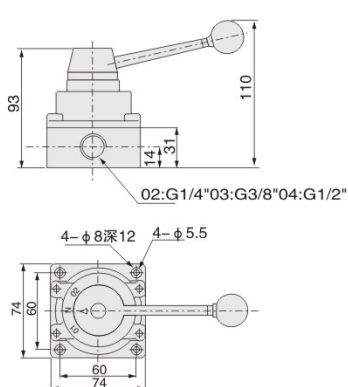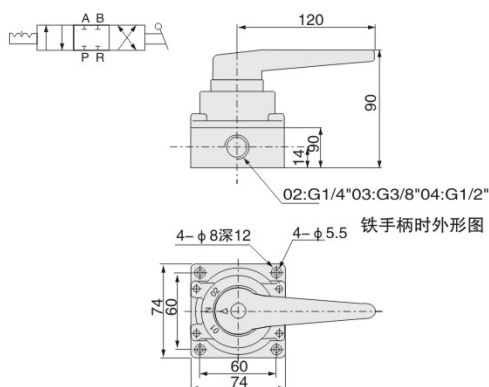

K34R6-L8

